



HOTELS | MOTELS | ASSISTED LIVING FACILITIES | CLINICS | OFFICES | CLASSROOMS



cooperandhunter.us | TECHNICAL SUPPORT 786-953-6706



Customer Model		CH-PTW-09HPGF	CH-PTW-12HPGF	CH-PTW-HE15HP	
Power Supply		V-Ph-Hz	208/230,1, 60	208/230,1, 60	208/230,1, 60
Cooling	Rated Capacity	Btu/h	9,300/9,200	12,000/11,800	14,700/14,500
	Input	W	820/810	1,040/1,020	1,390/1,370
	Current	A	4.2/4.6	5.3/5.8	6.5/7.4
	EER2	W/W	11.4	10.5	10.6
Heating (PTC) (Heat strip)	Capacity	Btu/h	10,900/8,900	10,900/8,900	10,900/8,900
	Input(Heater)	W	3,500/2,897	3,500/2,897	3,500/2,897
	Current	A	15.3/13.7	15.3/13.7	15.3/13.7
Heating (Heat pump)	Capacity	Btu/h	8,100/7,900	10,800/10,500	13,500/13,200
	Input	W	720/690	890/850	1,170/1,120
	Current	A	3.9/4.3	5.0/5.3	6.0/6.4
	COP	W/W	3.4	3.2	3.2
Indoor Air Flow (Hi/Lo)		CMF	362.9/300	438/344	416/330
Indoor Noise Level (Hi/Lo)		dB(A)	50/49.5	52/51.5	53/52.5
Outdoor Noise Level (Hi)		dB(A)	64	67	67
Refrigerant Type		Refrigerant type	R32	R32	R32
		oz	15.17	26.81	31.75
Design Pressure (Lo/Hi)		psi	540/300	540/300	540/300
OperationTemp	Indoor (Cooling/Heating)	°F	62°F-90°F/32°F-80°F	62°F-90°F/32°F-80°F	62°F-90°F/32°F-80°F
	Outdoor (Cooling/Heating)	°F	64°F-109°F/23°F-76°F	64°F-109°F/23°F-76°F	64°F-109°F/23°F-76°F
Dimension (WxDxH)		in	42x21x16	42x21x16	42x21x16
Packing (WxDxH)		in	44.5x25x19.3	44.5x25x19.3	44.5x25x19.3
Net/Gross Weight		lbs	99.2/108	110.2/119	113.5/122

- Auto Restart
- Fresh Air Ventilation
- Auto Defrost
- LED Display
- Digital Temperature Control
- Smart Kit Built In
- Constant Fan Function



# Common PTAC Uses



Hotels / Motels



Assisted Living Facilities / Hospitals



Offices / Class Rooms

# Special Features



Cooper&Hunter's PTAC Units have the wireless Smart Kit built in. With this feature you can access and control your room temperature from anywhere through any smart device.




**DOWNLOAD THE COOPER&HUNTER  
REMOTE APP**

IOS

ANDROID



# PTAC Components

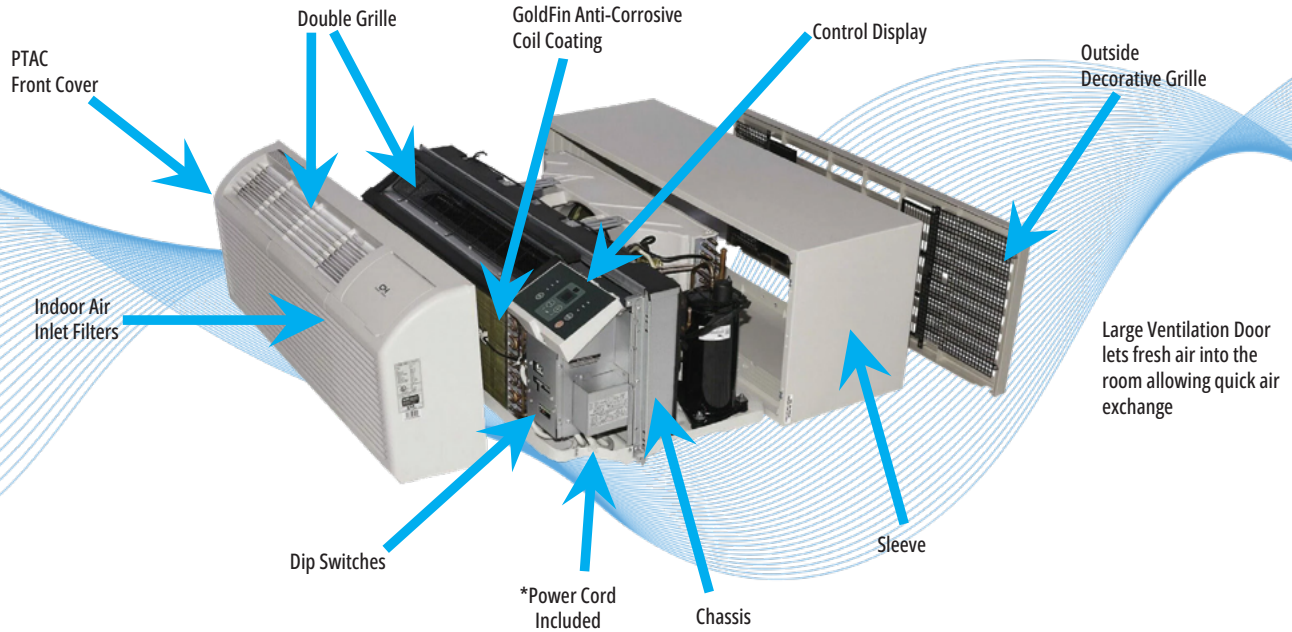

## PTAC Optional Accessories

- Foldable Wall Sleeve
- Architectural Grille



## PTAC Controls

Choose which control option works for you\*



PTAC Control Display



Remote Control Included



\*Compatible with any Universal 24V Wall Thermostat



C&H App for Smart Devices



TECHNICAL SUPPORT  
[cooperandhunter.us](http://cooperandhunter.us) | 786-953-6706

Your actual Inverter Heat Pump system and related devices may differ from images shown in this specification sheet. Test conditions are based on AHRI 210/240. Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or change specifications or designs at any time without incurring obligations.

© 05.2024 All rights reserved.

